



ASSEMBLY INSTRUCTIONS

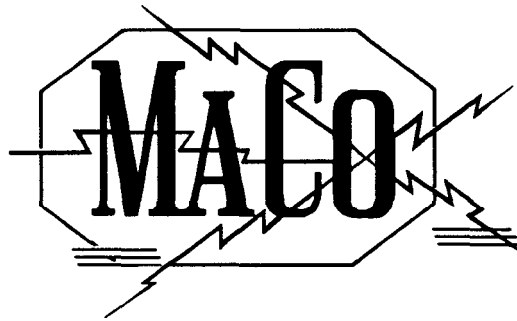

MAXIMUM BEAM
STACK KIT FOR
M103C THROUGH M107C

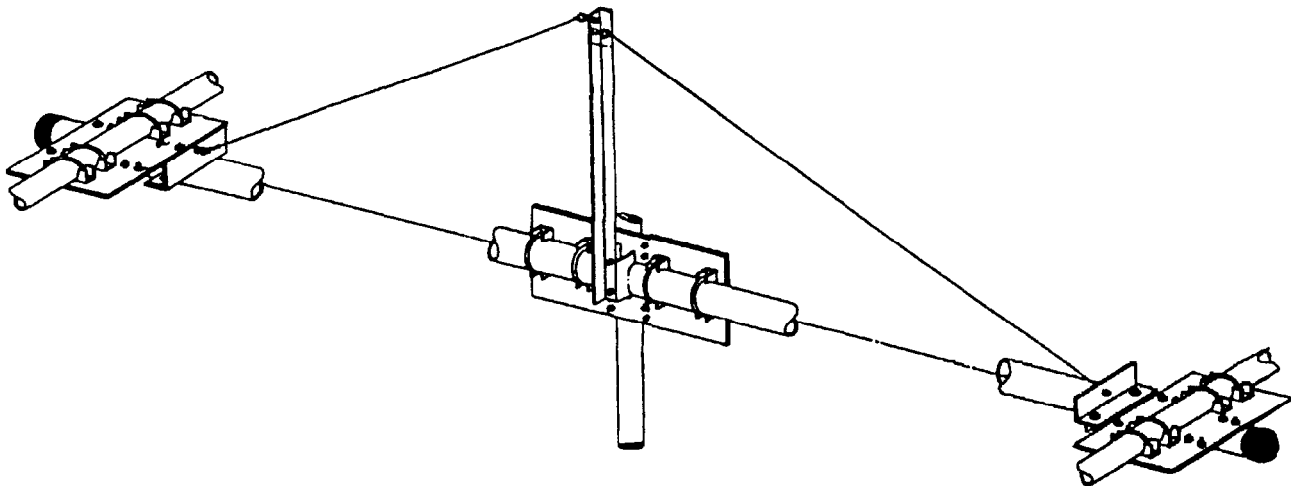

MBSK

Maco Antennas, a Division of Charles Electronics, LLC
302 S. East St. Mount Carroll, IL 61053
815-244-3500

MBSK STACK KIT

PACKING LIST

<u>PART</u>	<u>QTY</u>	<u>O.D.</u>	<u>SIZE</u>	<u>LENGTH</u>	<u>DESCRIPTION</u>	<u>CHECKLIST</u>
T21	2	2"		80"	ALUMINUM TUBING	___
T53	2	1.845"		80"	ALUMINUM TUBING	___
T61	1	1.685"	.050"	18"	ALUMINUM TUBING	___
V01	1	1"x1"		18"	GUY SUPPORT	___
WD2	1	6/18	25'		STEEL GUY CABLE	___
P03	1	1/4" x 6"	8"		ALUM PLATE 2" STACK BOOM TO 2" MAST PIPE	___
WH2HDP	1	18'			CO-PHASING HARNESS	___
	1				T COAX CONNECTOR	___
	1				COAX SEAL	___
MBSK HARDWARE BAG #1						
U01	12	2"			PLATED U-BOLTS	___
S01	12	2"			PLATED SADDLES	___
N03	24	5/16"			LOCK NUTS	___
MBSK HARDWARE BAG #2						
N18	4	5/16"	4"		EYE-BOLT W(8) N01	___
BG2	2				BOOM TO GUY MOUNTS	___
PL5	2	2"			PLASTIC CAPS – BLACK	___
EG2	6				EGG INSULATORS	___
MBSK	1				INSTRUCTION SHEET	___
	1				WARRANTY SHEET	___
	1				MACO FLYER	___

Please note: In an effort to keep the price on Maco Antennas down, we have decided not to clean up all the burrs and rough edges on the parts. We recommend that you deburr and clean up each part with files, sandpaper, etc. so that they go together easily. We are aware this needs to be done but have elected not to do it to save you the money we would have to add to the price of the kit for this service.

MBSK

ASSEMBLY INSTRUCTIONS

FIGURE 1A

Slide the 1.832" O.D. reinforcing sections completely inside the 2" O.D. boom sections.

Slide the 18" coupler section half way into one of the above, then slide the other section over the coupler. Be sure the coupler remains centered during the next step of assembly.

FIGURE 1B

Attach the boom-to-mast plate to the boom with 2" U-bolts and saddles and 5/16" lockwashers and hex nuts. Before fully tightening the U-bolts, reverse another U-bolts at boom center so that it faces away from the plate and mount the guy support as shown.

FIGURE 2A

Attach the eyebolts to the guy support as illustrated.

FIGURE 2B

Mount the boom-to-guy supports as shown making certain that the plates are spaced properly. Complete the guy system as shown in the illustration.

FIGURE 3

Figures 3A & 3B shows only M105C and M106C, however, the same basic data applies to M103C through M107C.

It is easier to tune each beam separately in the horizontal position on a pipe 9' above the ground; then assemble, rather than to try tuning when stacked.

Connect the phasing harness coaxial connectors to the gamma matches of your Maxi Beams. Tape the harness along the booms and down the mast. Any length of RG8 or RG58 may be connected to the phasing harness.

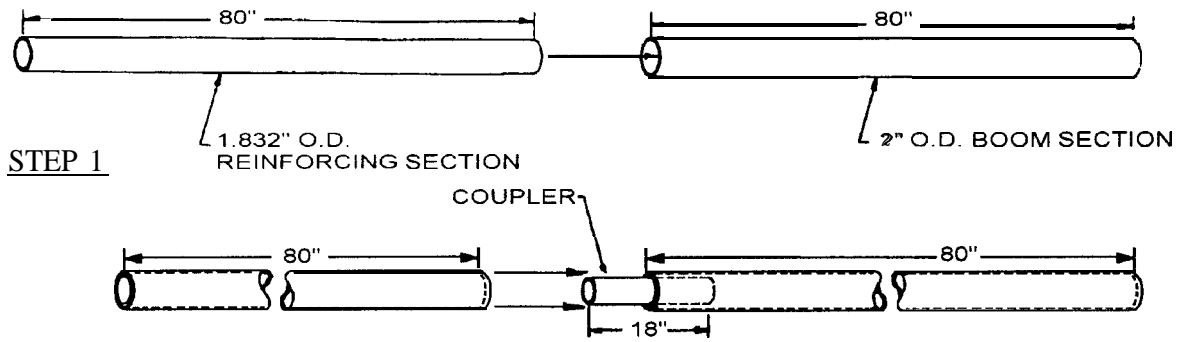
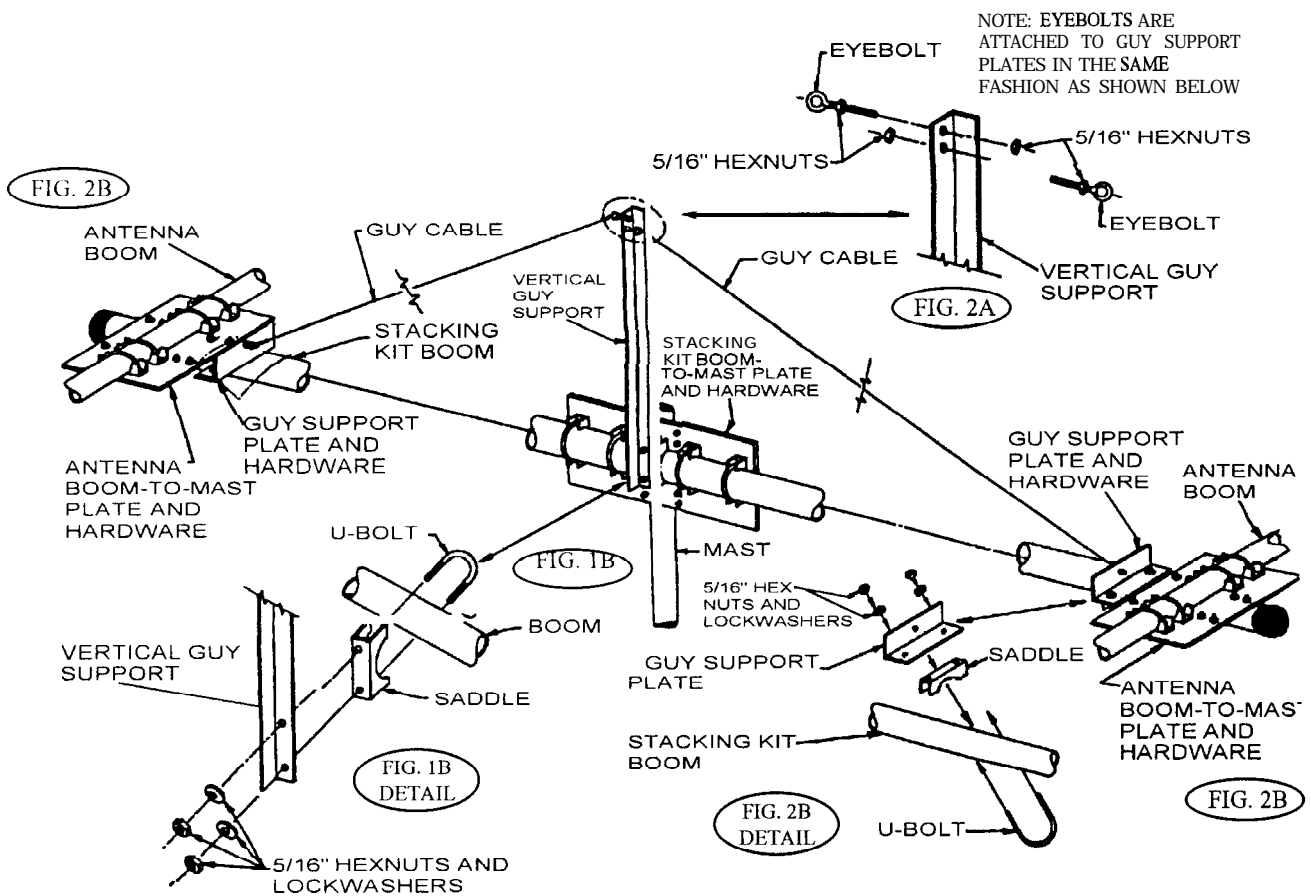


FIG. 1A

BOOM ASSEMBLY
MBSK



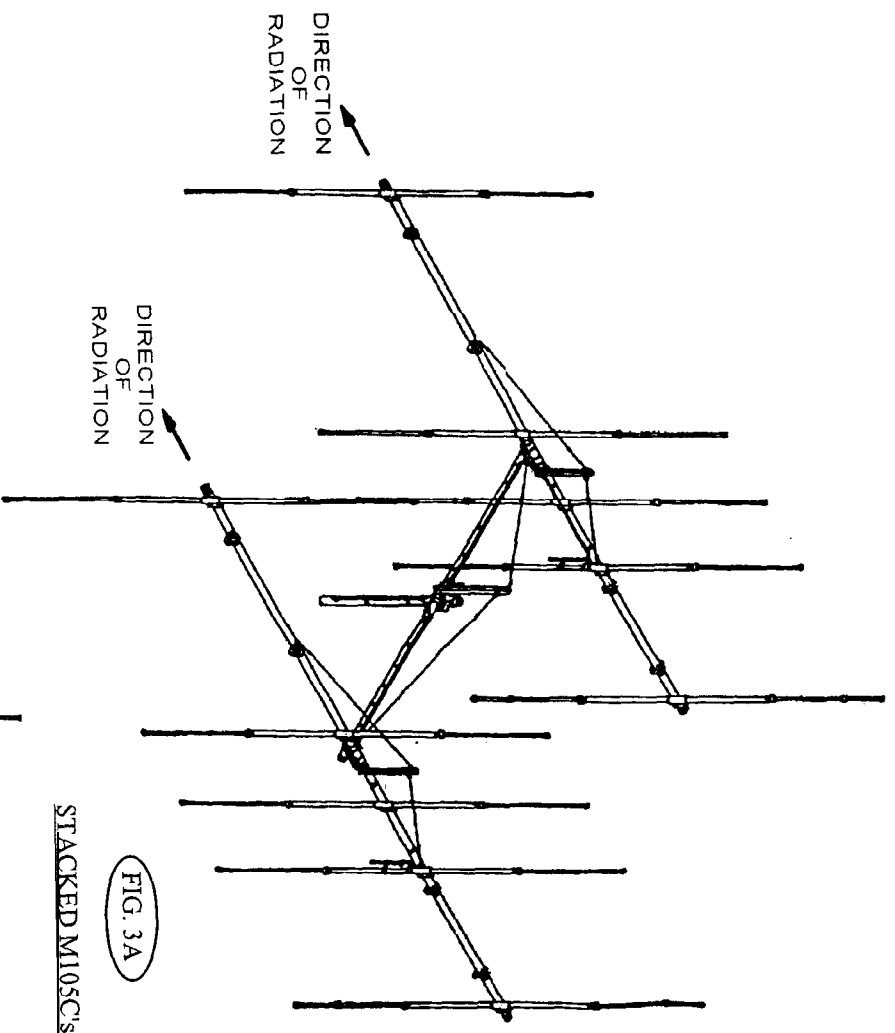


FIG. 3A
STACKED M105C'S

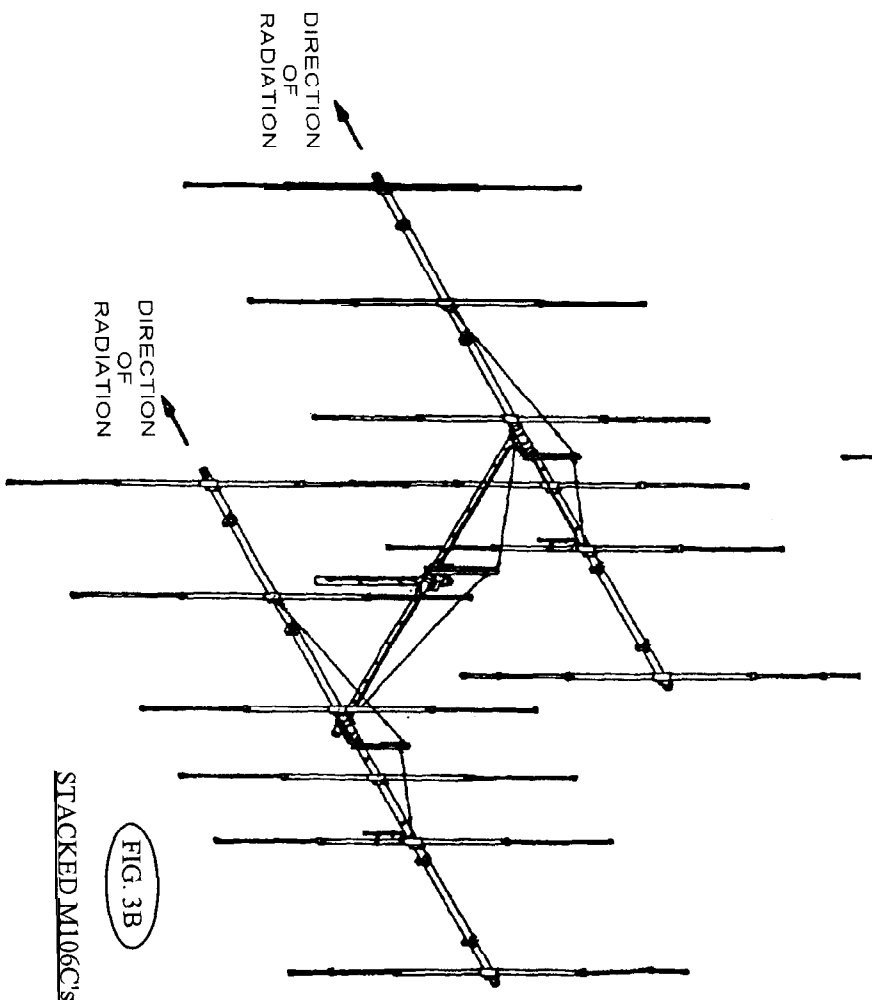


FIG. 3B
STACKED M106C'S